

Q1006

Sunset Lake

by Jim Hansel

WH Small Wall Hanging
Approximate Size: 36.5" X 31"

TH Wall Hanging/Throw
Approximate Size: 46.5" X 59"

Free Pattern
offered in
independent quilt
shops to comple-
ment this fabric
collection



Fabric A
42046-542 (24" x 43" Panel)
WH 1 PANEL (2/3 YD)
TH 1 PANEL (2/3 YD)



Fabric B
42047-254 (24" Repeat)
TH 1 1/2 YARDS



Fabric C
42049-542
WH 2/3 YARD



Fabric D
42049-842
TH 1 1/4 YARDS



Fabric E
42050-584
WH 5/8 YARD
TH 1 YARD



Fabric F
42051-482
WH 1 1/4 YARDS
(Backing Only)



Fabric G
42052-289
TH 3 1/4 YARDS
(Backing Only)



Fabric H
42053-829
WH 2/3 YARD
TH 1 1/4 YARDS



Fabric I
42054-452
TH 1/3 YARD



Sunset Lake

Please read all instructions carefully before starting. All instructions include a 1/4" seam allowance and strips are cut from selvage to selvage unless otherwise stated.

Small Wall Hanging Instructions approximate size: 36 1/2" x 31"

1. Cut the following:

Fabric A - cut 1 - 18" x 23 1/2" (center design evenly)

Fabric C - cut 8 - 2" strips


Fabric E - cut 8 - 1 1/2" strips

Fabric H - cut 4 - 2" strips


BINDING - cut 4 - 2 1/4" strips, sew end to end and press in half

2. Piecing Order:

1. Prepare 4 identical border strip sets by sewing **C**, **E**, **H**, **E** and **C** strips side by side according to the diagram. Press to one side.

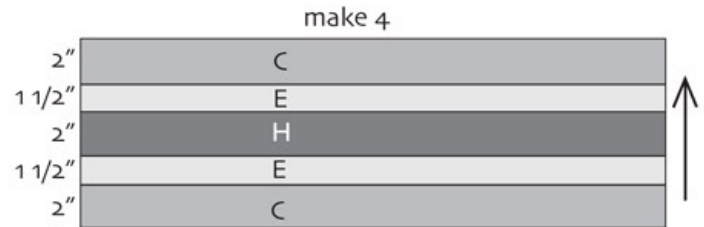

2. Fold each side of the quilt in half and mark with a pin. Fold each border strip set in half and mark with a pin. Match center of border strip sets and center of the quilt and sew borders to the quilt, opposite sides first, then top and bottom borders according to the diagram. Last, sew mitered angles.

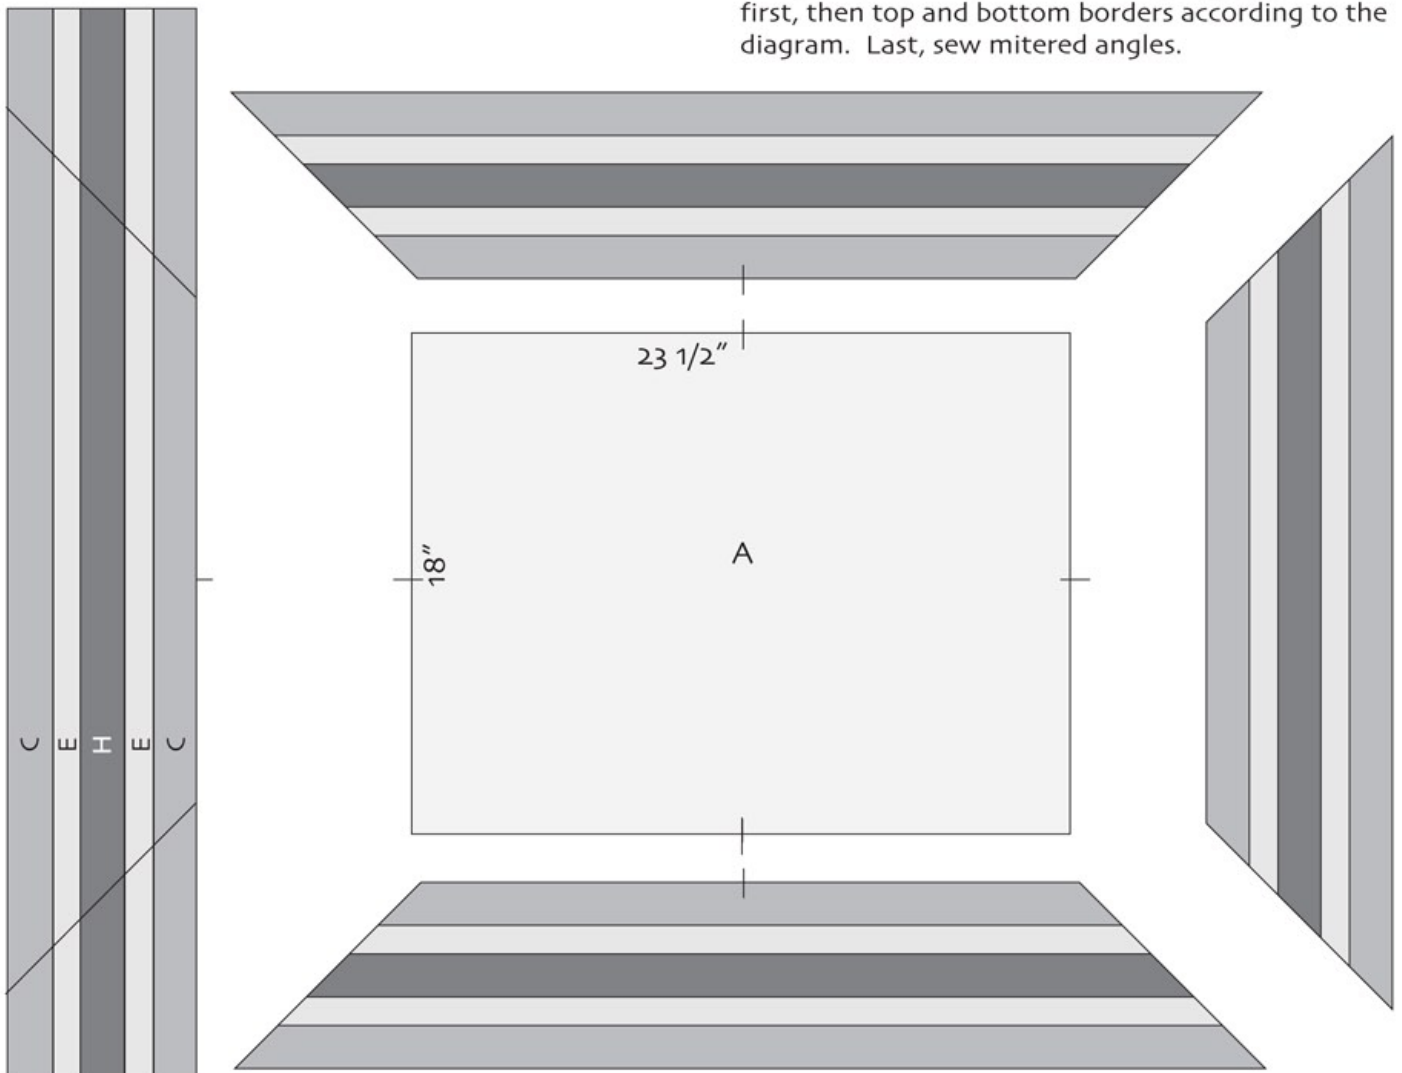

3. The Small Wall Hanging measures approximately 36 1/2" x 31". Make backing (**Fabric F**) several inches larger than the top. Layer and baste top, batting and backing together. Quilt as desired. Attach binding (**Fabric H**) and enjoy!!

Wall Hanging / Throw Instructions

approximate size: 46 1/2" x 59"

Page Two

1. Cut the following:

Fabric A - **cut 4 - 11 1/2" x 11 1/2" squares (center designs evenly)

Fabric B - cut lengthwise 2 - 5 3/4" x 44 1/2"

Fabric D - **cut 6 - 1" strips, subcut 8 - 1" x 11 1/2" and 8 - 1" x 12 1/2"

cut 10 - 2 1/2" strips

Fabric E - cut 6 - 2 1/2" strips

cut 1 - 4 1/2" strip

cut 1 - 2 1/2" strip, subcut 8 - 2 1/2" x 4 1/2" rectangles

Fabric H - cut 3 - 2 1/2" strips


Borders: cut 8 - 1 1/2" strips, subcut 2 - 1 1/2" x 44 1/2", 2 - 1 1/2" x 57" and 2 - 1 1/2" x 46 1/2"

BINDING - cut 6 - 2 1/4" strips, sew end to end and press in half


Fabric I - cut 5 individual 4 1/2" x 4 1/2" squares by centering designs

2. Piecing Order:


1. Sew **D** 1" borders around 4 **A** 11 1/2" squares, **SIDES** first, then **TOP** and **BOTTOM** borders. ** (If **A** measurements are slightly different, cut **D** borders slightly larger, sew around **A** squares, then trim all blocks to measure 12 1/2" x 12 1/2".)

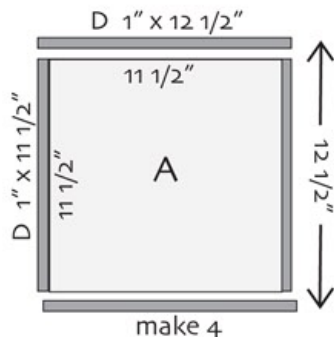

2. Make 5 - 12" finished (12 1/2" unfin.) Pieced Blocks. First, make 20 - 4" finished (4 1/2" unfin.) **D/E** 4-patches. Make three strip sets by sewing **D** and **E** 2 1/2" strips side by side. Press toward **D**. Subcut 40 - 2 1/2" segments. Then sew segments together for 20 4-patches.

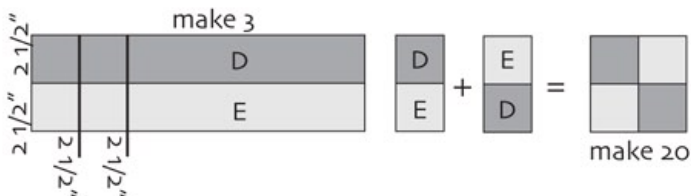


Next, make 3 strip sets by sewing **D** and **H** 2 1/2" strips side by side. Press toward **D**. Subcut 20 - 4 1/2" segments.

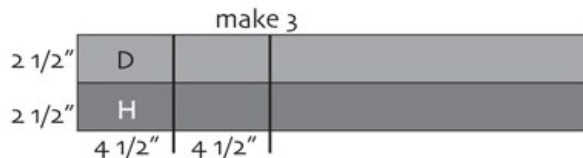


Then, sew pieced blocks together by rows


according to the diagram. Arrows indicate pressing directions.

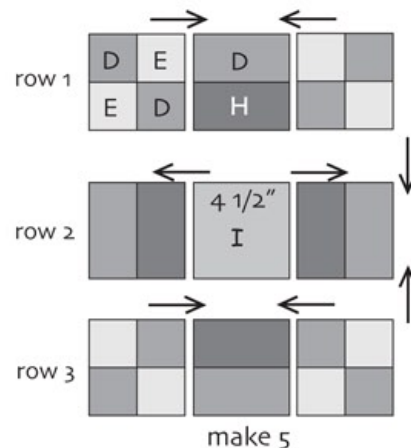

3. Make sashing strip #1 by sewing strips side by side according to the diagram. Press toward **D**. Subcut 16 - 2 1/2" sashing strips.

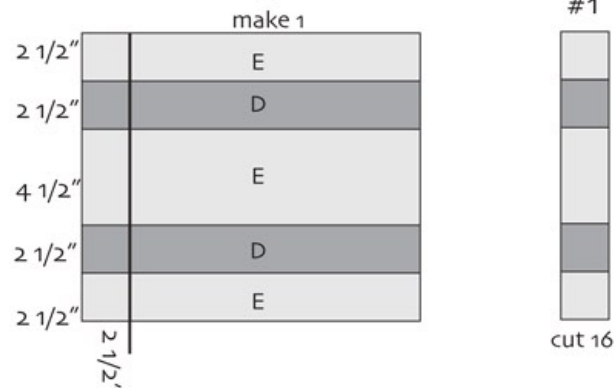


4. Sew sashing strip #1 to both sides of the pieced blocks according to the diagram.

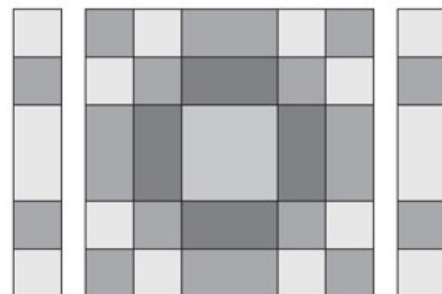


make 5

5. Make sashing strip #2 by sewing strips side by side according to the diagram. Press toward **D**. Subcut 16 - $2\frac{1}{2}$ " segments. Then make 8 sashing strips #2 by sewing 2 segments and 1 E $2\frac{1}{2}$ " x $4\frac{1}{2}$ " rectangle together according to the diagram.

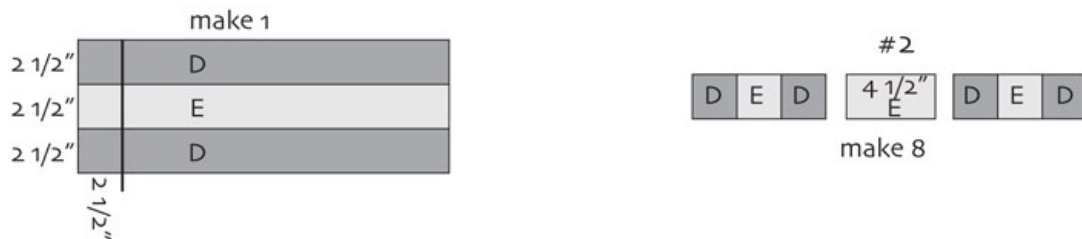


6. Make 4 rows of sashing by sewing #2, #1 and #2 sashing strips together, end to end.

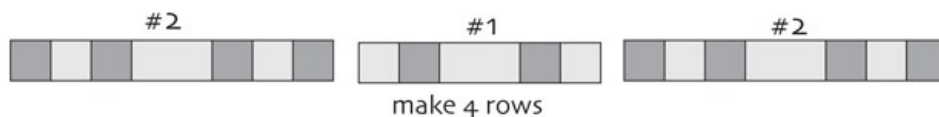

7. Sew quilt center together by rows alternating **A** blocks, sashing strip #1, pieced blocks and sashing rows according to the diagram.

Next, sew **H** $1\frac{1}{2}$ " x $44\frac{1}{2}$ " and **B** $5\frac{3}{4}$ " x $44\frac{1}{2}$ " to the **TOP** and **BOTTOM**. Then sew **H** $1\frac{1}{2}$ " borders around the quilt, **SIDES** first, then **TOP** and **BOTTOM** borders according to the diagram.

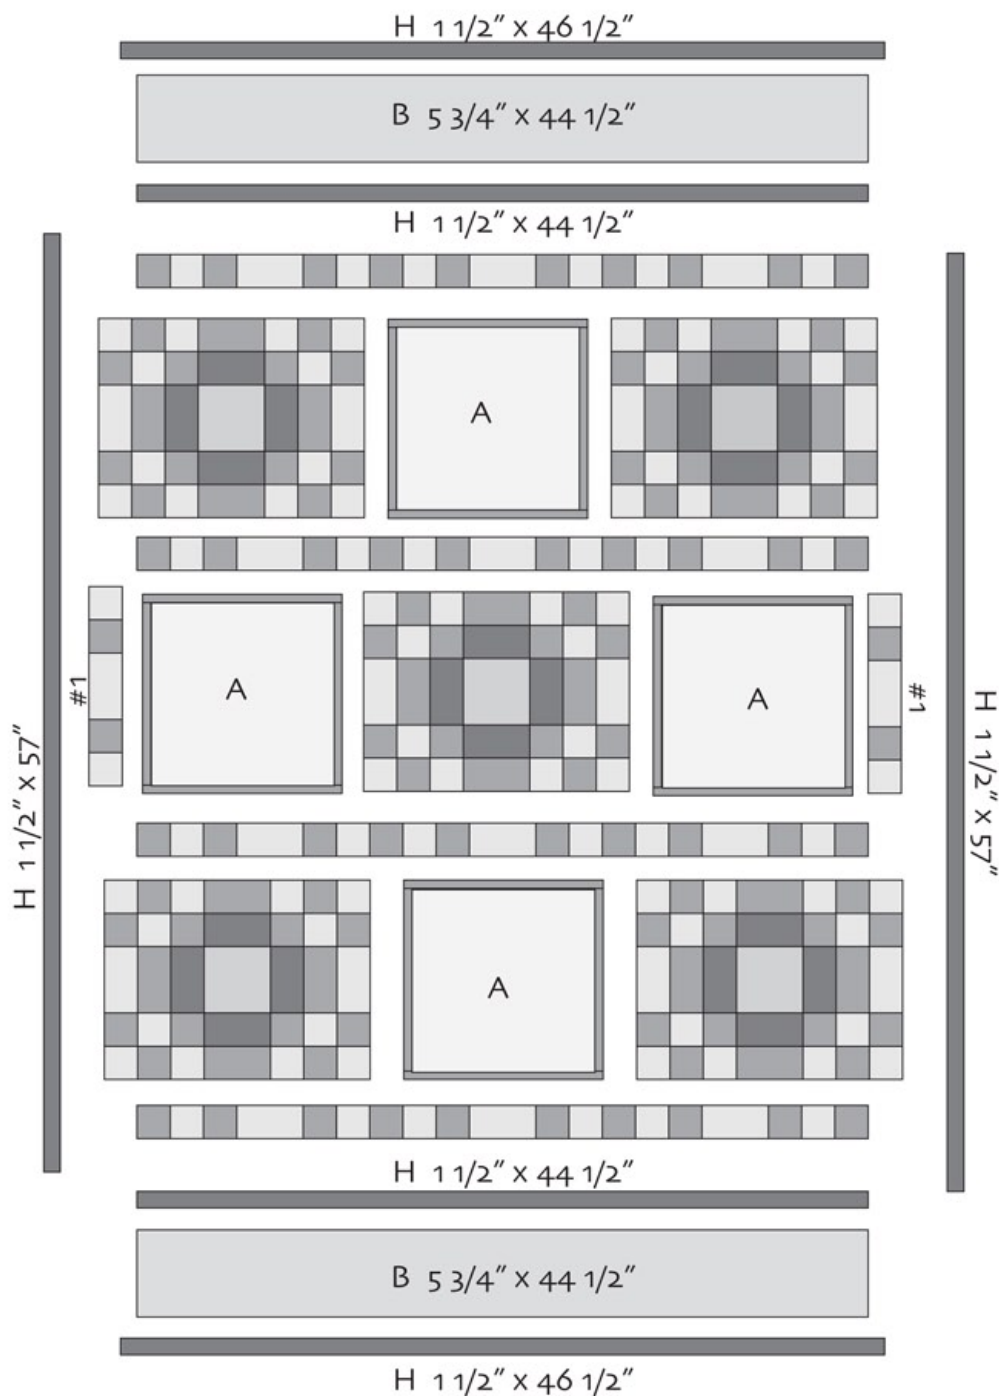

8. The Wall Hanging/ Throw measures approximately $46\frac{1}{2}$ " x 59 ". Make backing (**Fabric G**) at least 6" larger than the top. Layer and baste top, batting and backing together. Quilt as desired. Attach binding (**Fabric H**) and enjoy!!